

DR. MERCOLA®
HEALTHY HOME



Clear Air

Whole Home
Air Purifier

Owner's Manual

Table Of Contents

Packaged Materials	2
Records	2
Welcome	3
Specifications	3
Cautions & Warnings	4
Diagrams	5 - 8
Getting Started	9
Maintenance Reminders	9
Initial Settings	10
Controls	11
Disassembly	12 - 13
Assembly	14 - 15
Cleaning & Maintenance	16
Troubleshooting	17 - 18
Warranty	19

Packaged Materials:

1 ClearAir Whole Home Air Purifier	1 Power Cord
1 Quick Start Card	1 Owner's Manual
1 DC Power Adapter	1 Remote with Batteries

Records

Please record the serial number of your ClearAir Whole Home Air Purifier.

Serial # _____

Welcome

Thank you for purchasing Dr. Mercola's ClearAir Whole Home Air Purifier. This Purifier combines four different technologies: Photocatalytic Oxidation (PCO), Ionization, Activated Oxygen, and Filtration to purify the air and surfaces throughout your home.

Follow the instructions provided with your ClearAir Whole Home Air Purifier to assist with easy set up and continued usage instructions. After 30 days of continuous use, the unit will display the message "Perform Cleaning" to remind you to perform maintenance cleaning on the unit. Follow the instructions provided within this owner's manual

Your ClearAir Whole Home Air Purifier contains two parts that are required to be replaced. The first is the PCO CELL and the second is the PURIFICATION PLATE. On average, these parts need to be replaced once a year. However, they may need to be changed sooner or later depending on the level and type of pollutants found within your home environment. The Mercola.com Customer Service team can be reached at (847) 252-4355 to assist you with any questions and in placing an order for these replacement parts.

Specifications

Voltage	100-240 VAC 50/60Hz
Power Usage	38 Watts (Normal) / 50 Watts (High/Away)
Dimensions	12" H x 9" W x 12" D
Weight	10.2 lbs
Effective Area	.250 sq. ft. to 3000 sq. ft.

Cautions & Warnings

Review this list before using or performing maintenance on your ClearAir Whole Home Air Purifier.




- Never operate your ClearAir Whole Home Air Purifier near heat source, open flame or flammable/combustible fluids.
- Do not operate your ClearAir Whole Home Air Purifier unless all parts (including PCO CELL, ACTIVATED OXYGEN PLATE, REAR FILTER ASSEMBLY and REAR COVER) are properly installed.



- Directly viewing the ultraviolet lamp inside the PCO CELL in your ClearAir Whole Home Air Purifier when it is powered on may result in eye damage. Lamp should not be directly visible when mounted in completely assembled unit.
- Never adjust the square footage setting in HIGH MODE to exceed the actual square footage of the space being treated.
- Do not use AWAY MODE in occupied spaces. Short term exposure to ozone levels exceeding 0.5 ppm can cause temporary adverse reactions.
- The ClearAir Whole Home Air Purifier should be powered off and the POWER CORD should be disconnected when cleaning or servicing your unit.
- **The ClearAir Whole Home Air Purifier is not a medical device and should not be used to alleviate any medical issues that you may have. Please consult your physician before using the ClearAir Whole Home Air Purifier if you are worried that the machine could cause adverse effects.**

Diagrams - Purifier Exterior

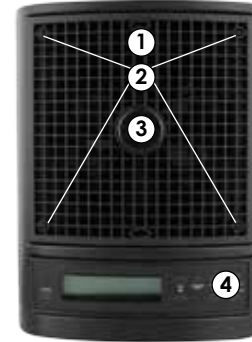

FRONT OF PURIFIER

- ① Ionization Needle
- ② Front Grille Screws
- ③ Front Grille
- ④ Control Panel



SIDE OF PURIFIER


- ⑤ Rear Cover
- ⑥ Purifier Rear
- ⑦ Purifier Front



REAR OF PURIFIER


- ⑧ Rear Cover Screw
- ⑨ DC Power Adapter Inlet

Diagrams - Purifier Interior/Power Supply

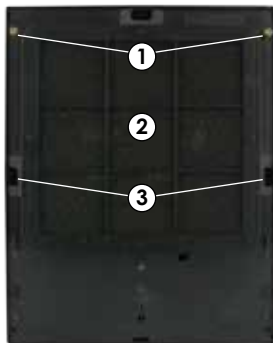


REAR with REAR COVER REMOVED

- 1 Brass Thumbscrews
- 2 Filter Assembly
- 3 Filter Assembly Clasps

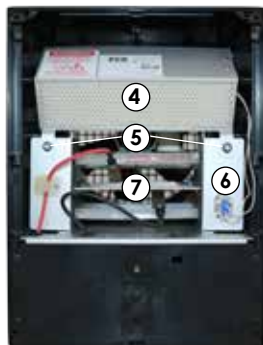

REAR with FILTER ASSEMBLY REMOVED



- 4 PCO Cell
- 5 PCO Cell Retaining Nuts
- 6 PCO Cell Connector
- 7 Purification Plate

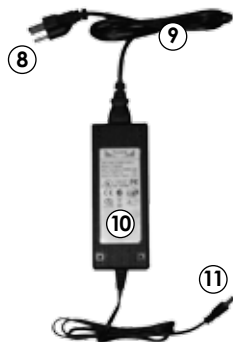

POWER SUPPLY

- 8 Power Cord
- 9 Power Cord Plug
- 10 DC Power Adapter
- 11 DC Power Adapter Plug


Diagrams - Controls

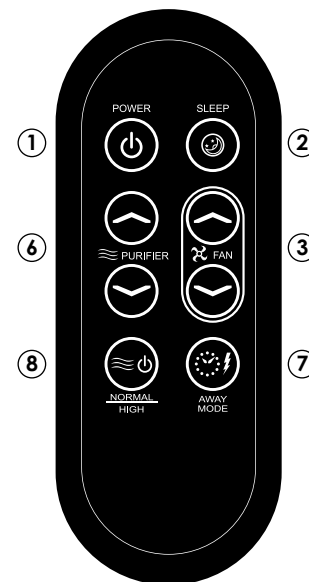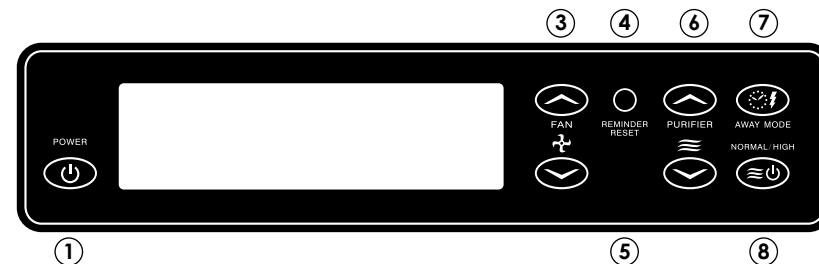

CONTROL PANEL and REMOTE

- 1 Power Button
- 2 Sleep Mode Control
- 3 Fan Speed Control
- 4 Reminder Reset Button
- 5 Infrared Receiver
- 6 Purifier Level Control
- 7 Away Mode Toggle
- 8 Normal/High Mode Toggle

Diagrams - Display

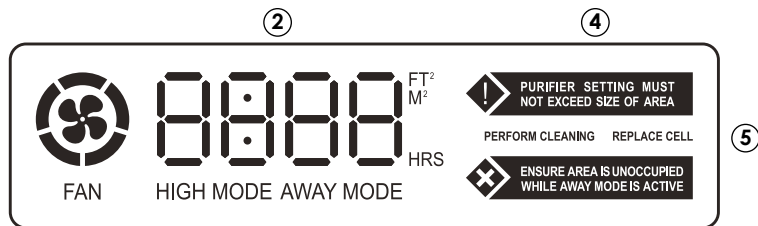

DISPLAY

- ① Fan Speed Indicator
- ② Mode Specific Display
- ③ Mode Indicator
- ④ Purification Level Warning
- ⑤ Maintenance Reminders
- ⑥ Away Mode Warning

Here's how the DISPLAY appears when in each of the modes:

PCO (Normal)



High Mode



Away Mode



Getting Started

1. Unpack your ClearAir Whole Home Air Purifier.

Remove all contents from the box. Check to make sure you have all the parts listed in “Packaged Materials” on page 2. Keep the original packaging in the event you need to return or exchange your ClearAir Whole Home Air Purifier. Once you are satisfied with your ClearAir Whole Home Air Purifier, please recycle the box and properly dispose of all other packaging materials.

2. Select a location for your ClearAir Whole Home Air Purifier.

Locate a common room that contains an HVAC return, or connects to a hallway that has an HVAC return. For best results, it is recommended that your ClearAir Whole Home Air Purifier be positioned within twelve to twenty-four inches (12”-24”) of the ceiling. It may be placed on a bookcase, shelf, or even a separate mounting bracket. For proper airflow, be sure to keep a three inch (3”) space between the rear of your ClearAir Whole Home Air Purifier and any other object. Point the unit towards the center of the room. Never place an operating unit on the floor.

3. Place your ClearAir Whole Home Air Purifier and plug it in.

Check to make sure your ClearAir Whole Home Air Purifier is secured. **Falling purifiers can cause serious injuries and may cause damage to the unit.** Unravel the cord attached to the DC POWER ADAPTER and the POWER CORD. Plug the DC POWER ADAPTER PLUG into the rear of the unit and then plug the POWER CORD into the wall. Make sure the POWER CORD is securely seated in the DC POWER ADAPTER, and that the green indicator light on the DC POWER ADAPTER is lit. This green light indicates that the unit has been properly connected.

Maintenance Reminders

PERFORM CLEANING

“Perform Cleaning” will appear once your ClearAir Whole Home Air Purifier has been run for 30 days total running time and the unit requires a complete cleaning. Follow the instructions in “CLEANING” on page 16.

REPLACE PCO CELL

When “Replace Cell” appears, the PCO CELL has stopped functioning (burned out) and must be replaced. Contact the Mercola.com Customer Service team at (847) 252-4355 for support. Once a replacement cell has been obtained, follow the instructions in “DISASSEMBLY” and “ASSEMBLY” (pages 12-15) to replace your old PCO CELL. Note that the PCO CELL relies upon ultraviolet (UV) energy to power the catalytic reaction. Over time, the UV energy output degrades. For this reason, the PCO CELL should be replaced after **one (1) year** of continuous operation (9,000 hours) regardless of the presence of the “Replace PCO Cell” maintenance reminder.

RESETTING REMINDERS

To reset the maintenance reminder, press and hold the REMINDER RESET button on the Control Panel until the reminder goes away.

Initial Settings

Before using your ClearAir Whole Home Air Purifier you will need to determine the area (or square footage) of the environment. To do this accurately, take into account all connected rooms with open doorways (the purification does not flow through closed doors). The ClearAir Whole Home Air Purifier can purify up to 3,000 square feet of space.

For example: Suppose you have a 2,500 square foot house. The living room is attached to the kitchen, three bedrooms, the den and a laundry room. The kitchen and three bedrooms' doors remain open the majority of the time, but the laundry room and den usually remain closed off from the rest of the house. Together, the laundry room and den have a combined area of 500 square feet. The area of the environment you would want to set your ClearAir Whole Home Air Purifier to purify would be 2,000 square feet.

Once you have calculated the area of the environment and determined an ideal location for the unit, connect the POWER CORD to the DC POWER ADAPTER and the DC POWER ADAPTER PLUG into the unit. (Check to be sure your power supply is properly assembled. The POWER CORD should be inserted far enough into the DC POWER ADAPTER so that a space of only about 1/8 in. is left between the widest part of the POWER CORD and the edge of the DC POWER ADAPTER.)

1. Insert the Power Plug into the wall outlet.
2. Turn the ClearAir Whole Home Air Purifier on and set it to NORMAL MODE (PCO) (see CONTROLS)
3. Leave the ClearAir Whole Home Air Purifier on NORMAL MODE (PCO) for at least 24 hours to begin with.
4. After 24 hours, set the ClearAir Whole Home Air Purifier to HIGH MODE and set the square footage to 250 square feet.
5. Gradually increase the square footage setting every 12 - 24 hours until you reach the accurate square footage of your area which you calculated in the beginning steps). Note: Using the ClearAir Whole Home Air Purifier at a setting less than the square footage of the area being treated is acceptable and may be desirable in an environment relatively free of pollutants.
6. Use your nose to confirm the proper square footage setting. If the setting is too low for the area, you may notice musty, cooking, animal, or other types of odors. If the setting is too high, you may notice an oxidation smell which some liken to the smell of chlorine. In either case, adjust the square footage on the DISPLAY using the PURIFIER LEVEL CONTROL up or down by 250 ft² until the only smell you notice is a clean, fresh living space.

Controls

Turning the Purifier On/Off:

Press the POWER BUTTON on the CONTROL PANEL or REMOTE to turn the ClearAir Whole Home Air Purifier on. The ClearAir Whole Home Air Purifier will initially be set to NORMAL MODE (PCO). Press the POWER BUTTON once more to turn the power off.

Using NORMAL MODE (PCO):

Press NORMAL/HIGH MODE TOGGLE until "PCO" is shown in the MODE SPECIFIC DISPLAY.

- Square Footage not available in "NORMAL MODE (PCO)"
- To control the fan speed: Use FAN SPEED CONTROL.

Using HIGH MODE:

Press the NORMAL/HIGH MODE TOGGLE and verify that "HIGH MODE" is shown in the MODE INDICATOR.

- To set the square footage on the DISPLAY:
Use PURIFIER LEVEL CONTROL (See "INITIAL SETTINGS" page 10).
- To control the fan speed: Use FAN SPEED CONTROL.



Never adjust setting to exceed square footage of ventilated space being treated.

Using AWAY MODE:

Press the AWAY MODE TOGGLE and verify that "AWAY MODE" is shown in the MODE INDICATOR.

- To set the AWAY MODE TIMER: press the AWAY MODE TOGGLE. Each press of the AWAY MODE TOGGLE adds two hours to the AWAY MODE TIMER.
- Select 2:00, 4:00, 6:00 or 8:00 hours.
- Press AWAY MODE once when the AWAY MODE TIMER shows 8:00 will revert the ClearAir Whole Home Air Purifier back to the mode it was in before you pressed the AWAY MODE TOGGLE.

Using SLEEP MODE:

If the light produced by the DISPLAY and CONTROL PANEL causes a distraction, such as when sleeping or viewing your television, simply press the SLEEP MODE CONTROL on the REMOTE and the lighting will cycle through: low brightness, off, high brightness.

Disassembly

Tools Required:

You will need a #2 Phillips screwdriver.

Workspace Recommendations:

A counter top or flat surface is ideal for disassembling/assembling your ClearAir Whole Home Air Purifier. You will need 2' x 3' of clean and clutter-free, accessible workspace. It is recommended to use a small bowl or cup to hold any screws so they are not lost during the disassembly process.

Disassembly Instructions:

1. Turn the ClearAir Whole Home Air Purifier off.
2. Remove the POWER CORD PLUG from the wall and the DC POWER ADAPTER PLUG from the rear of the unit.
3. Clean exterior of the ClearAir Whole Home Air Purifier if necessary (see "CLEANING" page 16).

Removing the REAR COVER:

1. Using your screw driver, remove the REAR COVER SCREW from the REAR COVER (above the DC POWER ADAPTER INLET). Place the REAR COVER SCREW where you will find it easily during reassembly.
2. Squeeze the sides of the REAR COVER until they release and tilt the REAR COVER slightly upwards and pull directly away from the unit. Clean with compressed air or a damp cloth. Set the REAR COVER aside.

Removing the FILTER ASSEMBLY:

1. Remove BRASS THUMBSCREWS from the top corners of the FILTER ASSEMBLY.
2. Place BRASS THUMBSCREWS where you will find them easily during reassembly.
3. Grasp the top of the FILTER ASSEMBLY and tilt away from the ClearAir Whole Home Air Purifier. Clean if necessary (see "CLEANING" page 16) and set the FILTER ASSEMBLY aside. Lift FILTER ASSEMBLY TABS on either side of FILTER ASSEMBLY to remove the rim and access the separate honeycomb, foam and mesh layers.

Disassembly

Removing the PURIFICATION PLATE:

1. Grasp the PURIFICATION PLATE on the ceramic and gently pull it out of the grooves on the sides.
2. Clean (see "CLEANING" page 16) and set the PURIFICATION PLATE aside.

Removing the PCO CELL:

1. Locate the PCO CELL Connector on the right of the rear of the ClearAir Whole Home Air Purifier almost halfway up the unit (beside the PURIFICATION PLATE slot). Squeeze the tabs on the top and bottom of the PCO CELL Connector and pull gently until free from the PCO CELL Connector Outlet.
2. Remove the PCO CELL RETAINING NUTS from the Screw Posts on the right and left below the PCO CELL. Place the PCO CELL RETAINING NUTS where you will find them easily during reassembly.
3. Gently slide the PCO CELL out of the ClearAir Whole Home Air Purifier. Clean (see "CLEANING" page 16) and set the PCO CELL aside.
4. Clean the interior of the ClearAir Whole Home Air Purifier (see "CLEANING" page 16).

Removing the FRONT GRILLE:

1. Locate the four FRONT GRILLE SCREWS in the corners of the FRONT GRILLE. Using your screwdriver, carefully remove the FRONT GRILLE SCREWS. Place the FRONT GRILLE SCREWS where you will find them easily during reassembly.
2. Remove the FRONT GRILLE by tilting the top away from the unit until the FRONT GRILLE can be lifted free. Ensure that the IONIZATION NEEDLE (in the top center of the front of the ClearAir Whole Home Air Purifier) is not damaged. Clean the FRONT GRILLE if necessary (using compressed air, vacuum cleaner, damp cloth or warm soapy water) and set the FRONT GRILLE aside.
3. Clean the IONIZATION NEEDLE if necessary (see "CLEANING" page 16).

Assembly

Refer to “TOOLS & WORKSPACE” from “DISASSEMBLY” on Page 12

Installing the FRONT GRILLE:

1. Gently set the bottom of the FRONT GRILLE in place on the lower front of the ClearAir Whole Home Air Purifier and swing the top of the FRONT GRILLE into place, being careful not to damage the IONIZATION NEEDLE at the top center of the front of the ClearAir Whole Home Air Purifier.
2. Insert the FOUR FRONT GRILLE SCREWS one at a time until they are in place, but not tight. After all FRONT GRILLE SCREWS are in place, tighten them carefully.

Installing the PCO CELL:

1. Position the PCO CELL inside the ClearAir Whole Home Air Purifier so that the two tabs are on the bottom of the PCO CELL. Ensure the holes in the two tabs fit over the two screw posts. Screw the PCO CELL RETAINING NUTS onto the screw posts until they are snug.
2. Align the PCO CELL CONNECTOR to the PCO CELL CONNECTOR outlet and insert gently until the tabs at the top and bottom of the PCO CELL CONNECTOR snap into place, holding it in the PCO CELL CONNECTOR outlet.

Installing the PURIFICATION PLATE:

1. Holding the PURIFICATION PLATE by the ceramic, slowly insert it into the PURIFICATION PLATE slot, ensuring that the PURIFICATION PLATE is properly sliding into the grooves on either side.

NOTE: About halfway in, the PURIFICATION PLATE connectors are parted. Continue sliding the PURIFICATION PLATE into the PURIFICATION PLATE slot until there is approximately one inch of the PURIFICATION PLATE remaining outside of the PURIFICATION PLATE slot and significant resistance is met. Be careful not to force the PURIFICATION PLATE further into the PURIFICATION PLATE slot as this could seriously damage your ClearAir Whole Home Air Purifier.

Assembly

Installing the FILTER ASSEMBLY:

1. Hold the FILTER ASSEMBLY with the larger flat side (where the honeycomb layer of the filter is visible) facing the interior of the ClearAir Whole Home Air Purifier.
2. Insert the bottom of the FILTER ASSEMBLY into the tabs on the rear of the ClearAir Whole Home Air Purifier and then seat the FILTER ASSEMBLY on the rear of the unit. (NOTE: If the user fails to insert the FILTER ASSEMBLY into the tabs appropriately, disassembling the unit in the future could be extremely difficult.)
3. Screw the two BRASS THUMBSCREWS into their holes at the top corners of the FILTER ASSEMBLY.

Installing the REAR COVER:

1. Place the tabs at the top of the REAR COVER into the holes above the top of the FILTER ASSEMBLY then swing the REAR COVER flat against the rear of the ClearAir Whole Home Air Purifier and press until the tabs on the inner sides of the REAR COVER click into place in the unit.
2. Carefully insert the REAR COVER SCREW into its hole on the REAR COVER (above the POWER CORD Port) and tighten.

Installing the POWER CORD:

1. Insert the DC POWER ADAPTER PLUG into the rear of the ClearAir Whole Home Air Purifier.
2. Ensure the POWER CORD is properly connected to the DC POWER ADAPTER.
3. Insert the POWER CORD PLUG into a wall outlet.

Turning the ClearAir Whole Home Air Purifier On:

1. Press the POWER BUTTON.
2. The ClearAir Whole Home Air Purifier will be set to NORMAL MODE (PCO) once again. Ensure that the settings are adjusted to suit your preferences (see “CONTROLS” on page 11).

Cleaning & Maintenance

Your ClearAir Whole Home Air Purifier should be cleaned at least once a month to keep it running at peak performance, but may be required more often if its operating environment is heavily contaminated.

Cleaning the ClearAir Whole Home Air Purifier (Exterior):

Wipe down the exterior with a damp cloth or use compressed air or a vacuum cleaner to remove dust.

Cleaning the FILTER ASSEMBLY:

You may use clean water or compressed air to clean your FILTER ASSEMBLY once it has been disassembled (see “DISASSEMBLY” on page 12). After disassembling your ClearAir Whole Home Air Purifier, the three filters (mesh, foam and honeycomb) should be removed and cleaned separately. If using water, you must allow the filters to completely dry separately before reassembly. When reassembling, the Honeycomb Filter goes in first, then the Foam Filter, and finally the thin Mesh Filter. Lastly, reattach the rim to the FILTER ASSEMBLY.

Cleaning the IONIZATION NEEDLE:

Using a cotton applicator (Q-tip), apply a small amount of clear alcohol-based cleaner (or rubbing alcohol) to the IONIZATION NEEDLE. You may also use compressed air to blow off any dust that may accumulate near the IONIZATION NEEDLE.

Cleaning the PCO CELL:

Using a compressed air or a vacuum cleaner, blow and/or vacuum the dust out of the PCO CELL. Do not use any liquid to clean the PCO CELL. Do not disassemble the PCO CELL.

Cleaning the PURIFICATION PLATE:

Using white vinegar or a solution of equal parts warm water and clear ammonia, soak the PURIFICATION PLATE for 8-10 hours but do not exceed 12 hours. Using a soft-bristle brush, scrub the wire mesh to remove debris. Rinse thoroughly. Allow the PURIFICATION PLATE to dry completely before reinstalling. Use a soft cloth and rubbing alcohol to clean the contacts on the interior of the ClearAir Whole Home Air Purifier that touch the PURIFICATION PLATE.

Cleaning the ClearAir Whole Home Air Purifier (Interior):

Using a damp cloth, a clear alcohol-based cleaner, compressed air or a vacuum cleaner, carefully clean the walls and components inside of the ClearAir Whole Home Air Purifier only after completing the disassembly procedures found in DISASSEMBLY on pages 12 - 13.

Resetting the “PERFORM CLEANING” Maintenance Reminder:

To reset the “PERFORM CLEANING” maintenance reminder, press and hold the REMINDER RESET BUTTON until the reminder goes away. It will return after 30 days of use.

Troubleshooting

The ClearAir Whole Home Air Purifier Fails to Turn On:

1. Verify that the POWER PLUG is plugged into an operational wall outlet.
2. Ensure that the POWER CORD is fully inserted (leaving less than an 1/8”) into the DC POWER ADAPTER and the green light on the DC POWER ADAPTER is illuminated.
3. Ensure that the DC POWER ADAPTER PLUG is fully seated in the DC POWER ADAPTER INLET.
4. Verify the POWER BUTTON has been activated on the CONTROL PANEL.
5. If the POWER BUTTON on the CONTROL PANEL fails, use the POWER BUTTON on the REMOTE CONTROL. If the CONTROL PANEL fails, contact the Mercola.com Customer Service team at (847) 252-4355.

No Noticeable Activated Oxygen (Ozone) is Being Produced in HIGH MODE or AWAY MODE:

1. Ensure that the PURIFICATION PLATE is clean. (See “CLEANING” on page 16)
2. The PURIFICATION PLATE may not be working because it needs to be replaced. Try installing a new PURIFICATION PLATE.
3. Check the electrical contact arms which touch the plate to ensure that they are making proper contact with the metal mesh on the PURIFICATION PLATE.
4. Ensure the electrical contact arms which touch the plate are clean. Clean them with a soft cloth and rubbing alcohol.
5. Turn the lights off in the room and look through the FRONT GRILLE at the PURIFICATION PLATE. When it is operating properly, the PURIFICATION PLATE will produce a dim purple glow.

The PURIFICATION PLATE Generates an Electrical Arc, an Arcing Noise or a Burning Odor:

This means the PURIFICATION PLATE is damaged and must be replaced. To order a replacement, contact the Mercola.com Customer Service team at (847) 252-4355.

Troubleshooting

The PCO CELL is Not Lighting Up:

1. Ensure the PCO CELL CONNECTOR is properly seated in the PCO CELL CONNECTOR outlet (see “DISASSEMBLY” on pages 12 - 13).
2. If the PCO CELL still fails to operate, it needs to be replaced. Contact the Mercola.com Customer Service team at (847) 252-4355.

The IONIZATION NEEDLE Creates an Electrical Arc:

The IONIZATION NEEDLE needs to be cleaned. Using a cotton swab soaked with rubbing alcohol, gently clean around the IONIZATION NEEDLE.

The Fan Does Not Operate Properly:

1. Try adjusting the fan speed using the CONTROL PANEL or REMOTE CONTROL.
2. Remove the FRONT GRILLE (see “DISASSEMBLY” on page 13) to ensure there are no obstructions to the movement of the fan.
3. If the fan continues to operate improperly or not at all, contact the Mercola.com Customer Service team at (847) 252-4355.

The ClearAir Whole Home Air Purifier Makes a Rattling Noise When Taken Out of Packaging:

Remove the REAR COVER of the ClearAir Whole Home Air Purifier. Check to ensure the two BRASS THUMBSCREWS holding the FILTER ASSEMBLY are in their proper place. If they are properly installed, remove the THUMB SCREWS and FILTER ASSEMBLY and check the PCO CELL to ensure the two PCO CELL RETAINING NUTS securing the PCO CELL are installed properly. Both the BRASS THUMBSCREWS and PCO CELL RETAINING NUTS can work themselves loose during shipment and storage of the ClearAir Whole Home Air Purifier.

Warranty Information

Your ClearAir Whole Home Air Purifier is warranted to be free from all defects in material and workmanship in normal household use for a period of **1 Year** from date of purchase. The warranty is granted only to the original purchaser and members of his or her immediate household. The warranty is subject to the following provisions. Any damages or malfunctions caused by negligence, abuse, or use not in accordance with the Owner’s Manual are not covered by this warranty. If the unit is dropped, damaged, or immersed in or splashed with liquids, these are not covered by this warranty. Likewise, any defects or damages caused by unauthorized service are not covered. Mercola.com Health Resources, LLC will, at its option, repair or replace a defective ClearAir Whole Home Air Purifier that is covered by this warranty. As a matter of warranty policy, Mercola.com Health Resources, LLC will not refund the customer’s purchase price. To obtain warranty service you must return the defective ClearAir Whole Home Air Purifier along with proof of purchase to Mercola.com Health Resources, LLC. All delivery charges on parts, or units, submitted under this warranty shall be borne by purchaser. Unless this Warranty is expressly renewed or extended by Mercola.com Health Resources, LLC, any repaired or replaced part of unit shall be warranted to the original purchaser only for the length of the unexpired portion of the original warranty.

FURTHER LIMITATIONS AND EXCLUSIONS ARE AS FOLLOWS: Any warranty that may be implied in connection with your purchase or use of the ClearAir Whole Home Air Purifier, including any warranty of merchantability is limited to the duration of this warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

Your relief for the breach of this warranty is limited to the relief expressly provided above. In no event shall Mercola.com Health Resources, LLC be liable for any consequential or incidental damages you may incur in connection with your purchase or use of the ClearAir Whole Home Air Purifier. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



DR. MERCOLA[®]
HEALTHY HOME

DISTRIBUTED BY: NHP
125 SW 3rd Place
Cape Coral, FL 33991 USA
(877) 985-2696
Made in China
20276-v400N